

## ADMA-Micro

*Our smallest GNSS-aided inertial navigation system with maximum performance level.*

The **ADMA-Micro** is our smallest GNSS-aided inertial measurement unit (IMU). It measures the 3D position in real-time within an accuracy of 0.01 m ( $1\sigma$ )<sup>\*2</sup>. Based on accelerations and rotation rates, which are also measured, velocities, position angles and heading can be determined. The use of MEMS gyros and accelerometers makes it possible to create a highly accurate, compact and lightweight device. Different structural shape allows choosing the right design for a variety of applications, including vehicles and VRUs (Vulnerable Road Users), construction machines, UGVs (Unmanned Ground Vehicles) and robotics.



Thanks to almost 35 years of GeneSys experience in inertial navigation systems, the ADMA-Micro is a fully-fledged GNSS-aided INS system combined with an advanced Kalman filter. High flexibility and an embedded webinterface provide quick and individual workflows. A wide range of free software solutions, such as the Data Reader Library for decoding the ADMAnet data stream or the ROS driver, allow an easy toolchain integration.

**0.01 m**

Position accuracy ( $1\sigma$ )<sup>\*2</sup>

**0.06 km/h**

Velocity accuracy (RMS)<sup>\*3</sup>

**< 1 ms**

Data latency

**100 Hz / 200 Hz**

Data output rate

## KEY FEATURES

- Our smallest GNSS/INS system
- Advanced Kalman filter for sensor fusion
- Centimeter-level positional accuracy RTK
- Real-time 3D position, velocity and attitude measurement up to 200Hz
- Data latency <1 msec
- Dual antenna support for highly accurate heading in static and low dynamic conditions
- Multi GNSS capability for a high position reliability
- Fully compatible with existing ADMA systems
- Embedded webinterface for easy configuration

## APPLICATIONS

The ADMA-Micro achieves highly accurate measurements of position, velocity, angles, rotation rates or accelerations of a moving object. The system is small, rugged and low powered, making it ideal for a range of applications including:

- Autonomous vehicle (AV) operation
- ADAS Evaluation e.g., ACC, FCW, AEB (VRU, Car2Car), LSS (LDW, LKA)
- Simultaneous Localization And Mapping (SLAM)
- Validation of predictive vehicle safety functions with e.g., Camera, Radar, Lidar sensors
- Vulnerable Road Users (VRU) Tracking
- Comprehensive vehicle safety functions with connected sensor systems and V2X


## ADMA ADD-ONS AND OPTIONS

**Meet new measurement and testing requirements with Add-Ons and Options.**

The new generation of ADMA 3.5 devices now allows our customers to meet their new and changing needs. Our focus is on straight-forward use and increased productivity. The Add-Ons and Options can be activated quickly and conveniently by entering a license key. This is possible at any time without modifications to the hardware. A high degree of flexibility is thus ensured.



**Add-On Smoothing**  
Define maximum step size for the GNSS signal




**Add-On FILTER**  
Option for online signal filtering



**Add-On PTP**  
Time synchronization with generalized Precision Time Protocol (gPTP)




**Option Dual-Ant**  
Two GNSS antenna option



**Option Vehicle Model**  
2D vehicle model predicts vehicle behavior, supports IMU & adapts to conditions




**Option DGNSS Correction Data**  
Correction data reception via Ethernet



**Option Internal Memory**  
Storing ADMA measurement data in internal memory

## DIMENSIONS – ADMA-MICRO-OEM

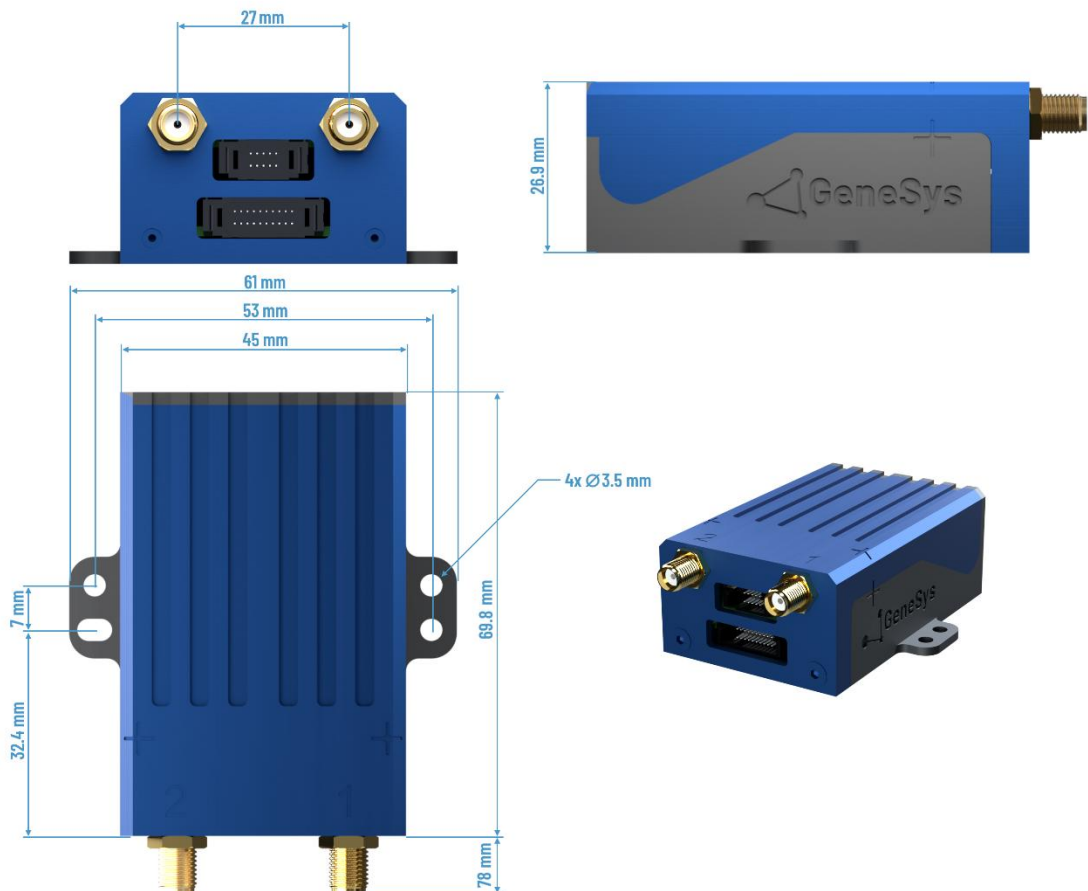

## DIMENSIONS – ADMA-MICRO



## TECHNICAL DATA

<b>Complete system</b>	
GNSS constellations	GPS L1, L2 GLONASS L1, L2 BeiDou B1, B2 Galileo E1, E5
Dual antenna	Optional
Position accuracy ( $1\sigma$ ) <sup>2</sup>	0.01 / 0.20 / 0.60 / 1.20 / 1.50 m
Angle measurement range roll / pitch / yaw	60 ° / 60 ° / ± 180 °
Velocity accuracy (RMS) <sup>3</sup>	0.06 km/h RMS
Data update rate	100 Hz / 200 Hz
Calculation latency	1 msec

<b>Sensors - Gyros</b>	
Sensor Technology	3 MEMS gyros
Measurement range <sup>4</sup>	± 450 °/sec
Data output resolution	0.0001 °/s
Bias repeatability typ. ( $1\sigma$ )	0.14 °/sec y-axis and z-axis 1.4 °/sec x-axis
In-run-bias typ.	2.7 °/h x-axis 2.2 °/h y-axis 1.6 °/h z-axis
Noise (random walk) typ.	0.15 °/ $\sqrt{h}$ x-axis and y-axis 0.2 °/ $\sqrt{h}$ z-axis
Sensor bandwidth	480 Hz x-axis and y-axis 590 Hz z-axis

---

**Sensors - Accelerometers**

Sensor Technology	3 MEMS accelerometers
Measurement range	± 15 g
Data output resolution	0.0001 g
Bias repeatability typ.	15 mg
In-run-bias typically (1 $\sigma$ )	12.75 $\mu$ g x-axis and y-axis 13.66 $\mu$ g z-axis
Noise (random walk) typ.	90 $\mu$ g / $\sqrt$ Hz x-axis and y-axis 75 $\mu$ g / $\sqrt$ Hz z-axis
Sensor bandwidth	750 Hz

---

**Interfaces**

Ethernet	1x 1 Gbit Data input/output, configuration and firmware update, driving robot data output, optional for relative data calculation and DGNSS routing.
CAN	1x CAN 2b, 1 Mbit Data output, input*1
Serial	1x RS232 GNSS Receiver / DGNSS correction data input, IPS (Indoor Positioning System)
Digital/Analog Input	2x Digital / Analog (16 bit) e.g. Frequency, Brake trigger, ...
Digital Output	2x Signal Out e.g. PPS, Frequency, PPD Pulse per distance, ...
Connector type	Samtec; Lemo
GNSS	2x SMA GNSS Antenna connectors

---

**Hardware / Miscellaneous**


---

	OEM-Version	Standard-Version
Dimension (W x L x H)	78.0 x 61.0 x 26.9 mm	93.0x 71.5 x 32.5 mm
Internal Memory	up to 64 GB	
Weight	0.116 kg	0,229 kg
Power supply	5 VDC typ. 7.5 W	9 to 32 VDC typ. 7.5 W
Operating temperature	-20 °C to +75 °C	
Protection class	IP 20	IP 67

\*1 Optional

\*2 Depending on GNSS conditions, correction data and license model

\*3 Typical values according to internal test standards with settled Kalman filter.

\*4 Calibration range 0 °/sec to 200 °/sec

**For any further questions:** [support@genesys-offenburg.de](mailto:support@genesys-offenburg.de)